


SPECIFICATIONS CIVIL ENGINEERING

PLANTER

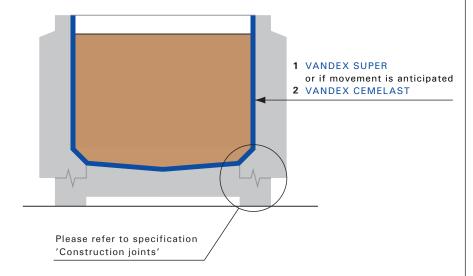

Application Instructions

1 Apply two coats of VANDEX SUPER to the interior wall and floor surfaces.

2 Apply two coats of VANDEX CEMELAST where movement is expected because of temperature variations, etc.

Remark:

- Substrate adhesion strength > 1.5 N/mm²

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.



HEAD OFFICE AND INTERNATIONAL SALES: Vandex International Ltd

P.O. Box · D-21487 Schwarzenbek/Germany





