


## SPECIFICATIONS CIVIL ENGINEERING

## **SWIMMING POOL - NEW CONSTRUCTION**

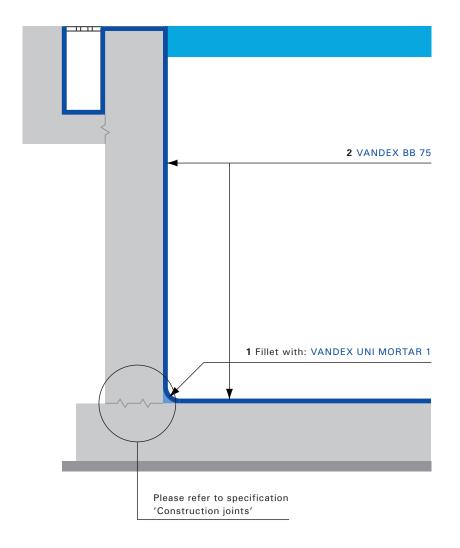

## **Application Instructions**

- **1** Apply an angle fillet with suitable mortar, preferably VANDEX UNI MORTAR 1.
- 2 Apply two coats of VANDEX BB 75.

## Remark:

- Substrate adhesion strength > 1.5 N/mm<sup>2</sup>

For further technical details and consumptions refer to technical data sheet or consult a technical Vandex representative.

The information contained herein is based on our long-term experience and the best of our knowledge. We can, however, make no guarantee since for a successful outcome, all circumstances in an individual case must be taken into consideration. Indications of quantities required are only averages which in certain cases might be greater.



HEAD OFFICE AND INTERNATIONAL SALES: Vandex International Ltd

P.O. Box · CH-4501 Solothurn/Switzerland +41 32 626 36 36 · info@vandex.com · www.vandex.com



Vandex Isoliermittel-Gesellschaft m.b.H.

P.O. Box · D-21487 Schwarzenbek/Germany





