

STOPAQ® 2100 AQUASTOP

Product Information

Product description: Stopaq® 2100 Aquastop is a compound suited for sealing of pipe- or cable wall inlets and hollow spaces against penetration of gases, moisture, standing water and running ground water leaks. It is a non-toxic, single component, elastic, water- and gas tight synthetic compound. It adheres on dry and wet surfaces of concrete, brick, PVC and others. There is no need for primer application, and it does not cure but remains permanently flexible. The compound does not build up internal stresses and expands when exposed to water. Stopaq® 2100 Aquastop compound must be covered with a barrier of water resistant- or fire retarding mortar.

Features:

- Minor surface preparation required
- Adheres on wet and dry surfaces
- Fast and easy to apply
- Does not harden and has no pot-life limitations
- Resists up to 0.5 bar of ground water pressure when appropriate barrier is applied
- Impermeable to water and gas
- Non-toxic, applicator- and environment friendly
- Does not age

Benefits:

- The sealing remains flexible permanently
- Does not require special tools for application
- No material waste – paste is re-usable
- Immediate sealing – no curing time
- Provides permanent and optimal safety
- No vapors or fumes, no chemical reactions
- Adjusts to slight movements of pipes & cables
- Allows adding and removing of cables in conduits at any time

Product certificate:

Stopaq® 2100 Aquastop is certified according to NSF/ANSI Standard 61: "Drinking Water System Components – Health Effects"

Application examples

Wall inlets below ground water level: Stopaq® 2100 Aquastop is suited for sealing against ground- and surface water ingress around pipes and cables, leading through wall inlets into basements.

Sealing of running water leaks: For permanent stopping of running ground- or surface-water leaks through cable- and pipe wall penetrations.

Wall penetrations inside buildings: Permanent sealing and protection of wall penetrations against gas, fire or flooding is obtained when the Stopaq® 2100 Aquastop is encapsulated by a fire retarding- and/or water resistant mortar barrier on each side of the seal.

Multi pipe- & cable inlets: Stopaq® 2100 Aquastop is perfectly suited for hermetic sealing of horizontal multiple pipe or cable wall inlets.


Product properties of Stopaq® 2100 Aquastop

Colour	Green
Density	1.35 ± 0.05 g/cm³ (NEN 1833)
Water absorption	5% - 20% (ASTM D 570)
Temperature Ranges	Application (ambient): +5°C to +35°C Service: -20°C to +35°C
Dimension criteria	– Between cable/pipe and wall min. 10 mm and max. 40 mm – Depth of wall inlet min. 150 mm
Compatibility	Stopaq® 2100 Aquastop is compatible with the following materials: <ul style="list-style-type: none"> – Bare metal pipes like carbon steel, stainless steel, galvanized steel, copper, etc. Additional anti-corrosion coating with e.g. Stopaq® Wrappingband is recommended in case of carbon steel pipes. – Pipe coatings like polyethylene (PE), polypropylene (PP) and liquid coatings like epoxies, etc. – Polymeric pipes like polyethylene (PE), polypropylene (PP), polyvinylchloride (PVC), etc. – Electrical cable insulating materials like polyethylene (PE), polyvinylchloride (PVC). For compatibility with rubber insulating materials please consult Stopaq b.v.

For more information, please contact Stopaq b.v.

Properties of seal constructed with Stopaq® 2100 Aquastop and SFL™ Mortar FR

Construction	– Stopaq® 2100 Aquastop: 100 mm thickness – SFL™ Mortar FR 50 mm thickness
---------------------	---



Maximum pressure	0.5 bar, i.e. 5 m of ground water pressure <i>Tested by Deutsche Telekom AG: TS0307/96, april 2005 – "Abdichtelement ADE und Abdichtmassen ADM für mit Kabel belegte Züge"</i>
-------------------------	---

General order information

Product	Stopaq® 2100 Aquastop is available in different packing sizes
Art. Nr.	Packing size
2000	Cartridge 310 ml, 25 pcs/box, 900 pcs/pallet
2002	Cartridge 0.53 kg, 20 pcs/box, 720 pcs/pallet
2005	Tubular bag 2 kg, 9 pcs/box, 324 pcs/pallet
2006	Cartridge 1.25 kg, 12 pcs/box, 468 pcs/pallet
2007	Pail 20 kg, 24 pails/pallet
Handling	Handle with care. Keep boxes upright
Storage	Store indoor, clean and dry, away from direct sunlight in a cool place at temperatures below 30°C. Unlimited shelf life.

Application instruction - Job preparation	
Pipe and cable fixation	Pipes and cables must be fastened to avoid excessive lateral movements. Lateral forces exerted to Stopaq® 2100 Aquastop and/or the mortar barrier may damage the integrity of the sealing.
Tools, equipment and auxiliaries	<ul style="list-style-type: none"> - Injection tool with appropriate nozzle - Application set - Measuring tape - Putty knife, blade 50mm wide - Abrading pads Scotch-brite type - Tube brush ø25mm - Compacting tool, e.g. pencil size piece of wood, for compacting of material in narrow gaps.
Additional materials	Backing: <ul style="list-style-type: none"> - Stopaq® Foam Band. Alternative backing materials may also be used e.g. Injectible PU-foam available at D.I.Y. shops Mortar barrier: <ul style="list-style-type: none"> - SFL™ Mortar FR: Fire Retardant mortar for application on the dry side of the seal, e.g. in basements. - SFL™ Mortar WR: Water Resistant Mortar, for application on the wet-side of the seal e.g. in water-basins. - Alternatively, mortars available at D.I.Y. shops may be used.
Ambient conditions	Ambient temperature should be between +5 and +30°C.
Substrate conditions	The temperature of all substrates (wall inlet, pipe- and cable surfaces) should be between +5°C and +35°C.
Hot conduits	Pipes and cables with surface temperatures above +35°C should be thermally insulated before application of Stopaq® 2100 Aquastop
Product conditions	Stopaq® 2100 Aquastop should be preheated to a temperature of min. +25°C to max. +35°C prior to application. This can be achieved by placing the packed material in a bucket with lukewarm water or by using a Stopaq® electrical cartridge heater (DC 12V).

Application instruction - Cleaning	
General	All surfaces must be free of oil, grease, dirt, dust and poorly adhering matter, such as cement film, paint or other.
Concrete and brick wall inlet	Clean interior of the wall inlet by means of a vacuum cleaner, rubbing with an abrasive pad, sweeping with a tube brush or flushing with clean water.
Polymeric pipe wall inlet	When the wall inlet is equipped with a polymeric pipe, the interior surface should be deglossed by rubbing it with an abrasive pad.
Polymeric pipe, coatings and cable surfaces	Surfaces of polymeric type should be deglossed by rubbing it with an abrasive pad.

Application instruction - Brief version	
Backing	In order to construct a proper seal and to prevent intrusion of soil, insert a backside barrier of Stopaq® Foam Band (or alternative) at the specified depth of 150mm in the inlet. The foam profile(s) should fill the gap between the pipe (or cable) and the boundary of the inlet. Leak water passing through the barrier will not affect proper application.
Multiple cable / pipe inlet construction	Where 2 or more cables are passing through one wall inlet, Stopaq® Foam Band should be wound around each cable / pipe in such a way that a minimum distance between the cables of at least 10 mm is achieved.
Injection of Stopaq® 2100 Aquastop	Insert a pre-heated cartridge of Stopaq® 2100 Aquastop into the injection tool and install the appropriate nozzle. The spout of the nozzle should be positioned as close as possible to the backing (150mm deep) at 6 o'clock position in the wall inlet. Start injection of the compound and move the nozzle from side to side, from bottom to top, while slowly moving the nozzle outwards. Make sure the nozzle remains in contact with the compound during injection. This will minimize the risk of air entrapment in the compound. Keep injecting the compound until a distance of 50 mm from the boundary of the wall inlet has been reached. Compact the applied material using a compacting tool in order to minimize air entrapment.
Application of Stopaq® Mortar	Apply SFL™ Mortar FR or WR in front of the previously applied Stopaq® 2100 Aquastop according to the applicable instructions.

Post application routines	
"Weeping" of seal	It might occur that a seal is weeping, i.e. the mortar barrier remains wet. If weeping has not stopped within 48 hours after initial application, post filling should be carried out as follows: <ul style="list-style-type: none"> - Drill a hole of about 12 -15mm diameter through the mortar barrier. - Use an injection tool with a cartridge that is equipped with a hard and rigid nozzle. - Push the injection nozzle into the hole and apply additional Stopaq® 2100 Aquastop. - Clean the wall of the hole from adhering Stopaq® 2100 Aquastop. Drilling or scraping the mortar may be helpful. Seal the hole with freshly prepared mortar.

Information	
Documentation	Extensive information is available on our web-site. Application instructions and other documentation can be obtained by contacting our head office, from our local distributor or by sending email to info@stopaq.com
Certified staff	Application of the described sealing system should be carried out by certified personnel.
Reliable performance	Being in service for more than 25 years, Stopaq® 2100 Aquastop has proven that the sealing properties of the material are reliable and have excellent performance over a long period of time.



Seal For Life Industries LLC
Franklin, MA, USA
Tel: +1 508 918 1600
Toll Free: +1 800 248 7659
Fax: +1 508 918 1905
franklin@sealforlife.com

Seal For Life Industries Mexico
S de R.L. de C.V.
Tijuana, Mexico
Tel USA: +1 858 633 9797
Fax USA: +1 858 633 9740
Tel Mx: +52 664 647 4397
Fax Mx: +52 664 607 9105
mexico@sealforlife.com

Seal For Life Industries
Stopaq B.V.
Stadskanaal, the Netherlands
Tel: +31 599 696 170
Fax: +31 599 696 177
info@sealforlife.com

Seal For Life Industries BVBA
Westerlo, Belgium
Tel: +32 14 722 500
Fax: +32 14 722 570
belgium@sealforlife.com

Seal For Life India Private Ltd.
Baroda, India
Tel: +91 2667 264 721
Fax: +91 2667 264 724
india@sealforlife.com

Anodflex® - Stopaq® - Polyken® - Covalence® - Powercrete® - Sealtaq® - Blockr® - Easy.Qote® - SynergyQ®

DISCLAIMER: Seal For Life Industries warrants that the product(s) represented within conform(s) to its/their chemical and physical description and is appropriate for the use as stated on the respective technical data sheet when used in compliance with Seal For Life Industries written instructions. Since many installation factors are beyond the control of Seal For Life Industries, the user is obligated to determine the suitability of the products for the intended use and assume all risks and liabilities in connection herewith. Seal For Life Industries liability is stated in the standard terms and conditions of sale. Seal For Life Industries makes no other warranty either expressed or implied. All information contained in the respective technical data sheet(s) should be used as a guide and is subject to change without notice. This document supersedes all previous revisions. Please see revision date on the left. Stopaq® is a registered trademark of Seal For Life Industries.

STOPAQ®

sealant
systems

2100 AQUASTOP

NEN-EN-ISO 9001



Sealing compound

Wall inlets below ground water level


Sealing of running water leaks

Wall penetrations inside buildings

Multi pipe and cable inlets

FEATURES


- Adhesion on wet and dry surfaces
- Fast and easy application
- Impermeable to water and gas
- Long term protection on cold underground inlets, does not age

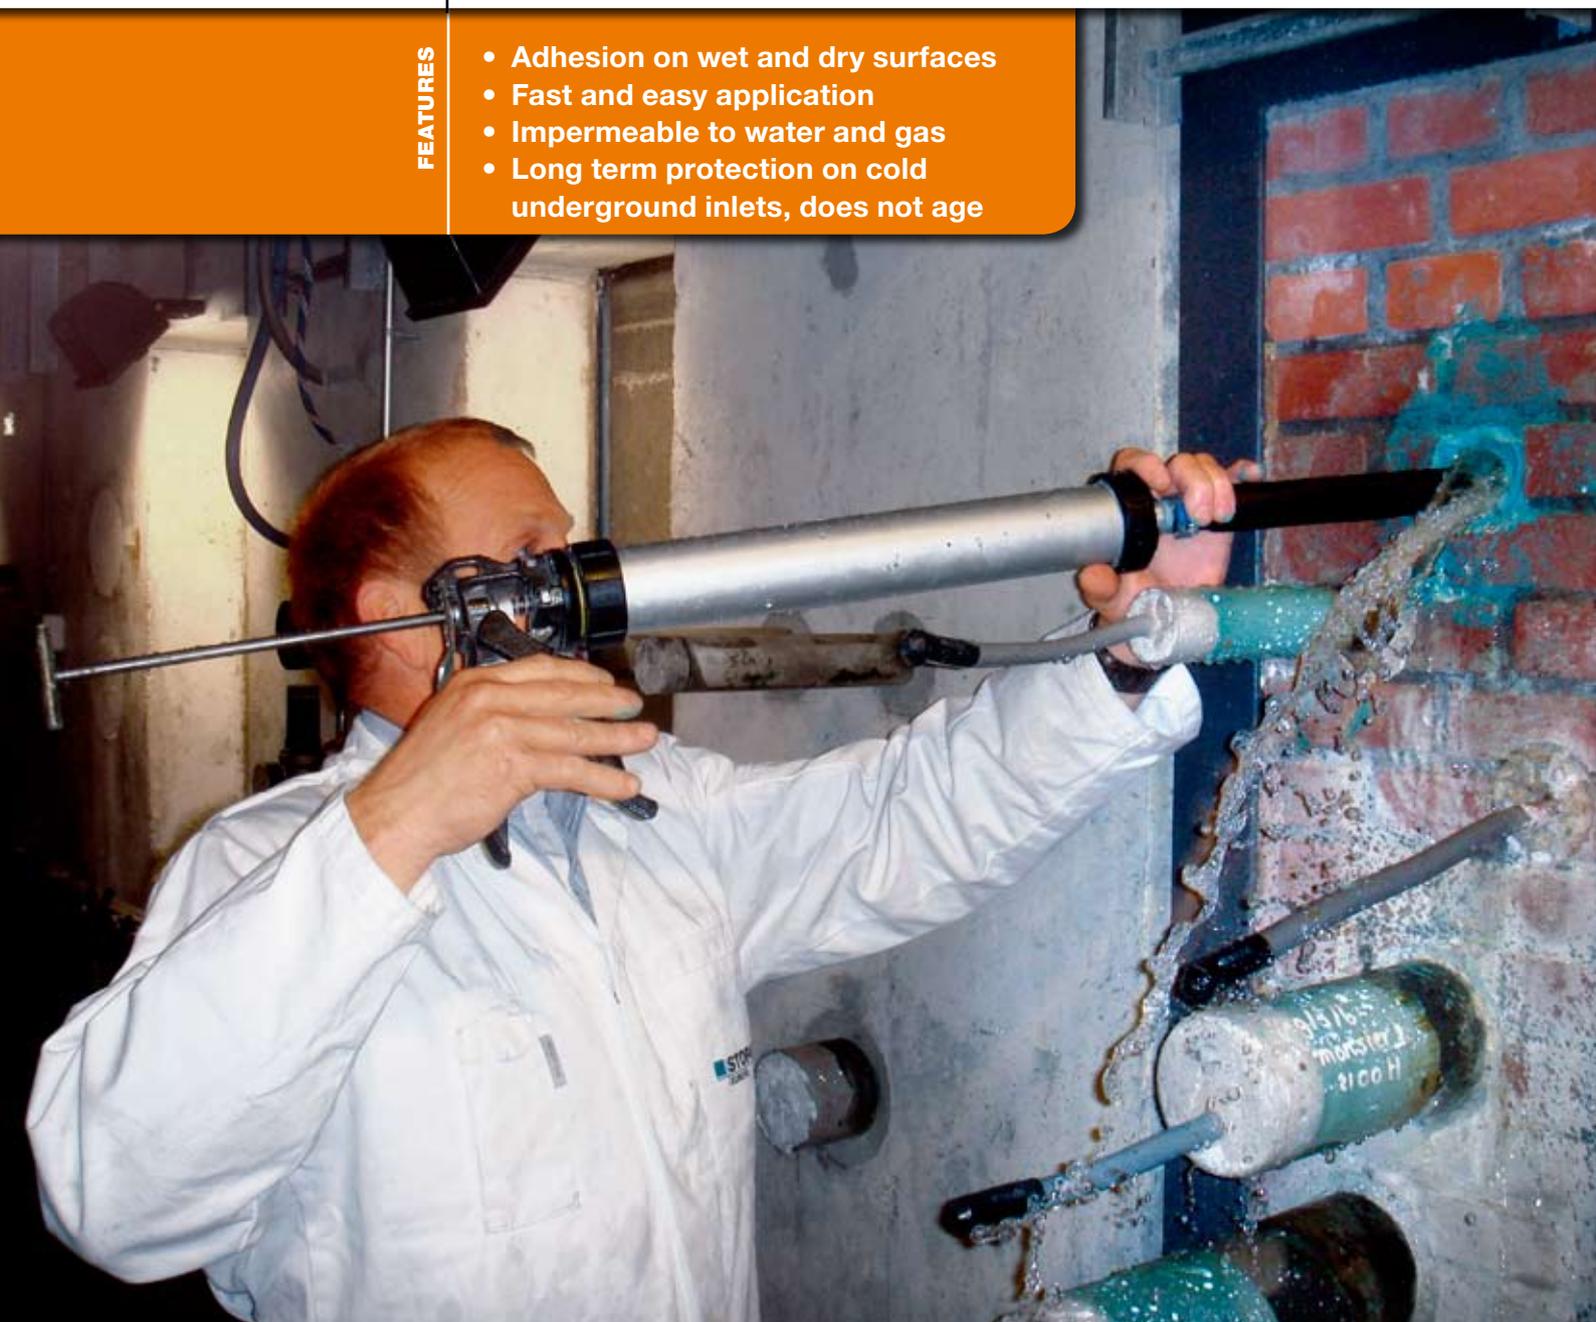

STOPAQ®
Self-healing corrosion prevention & sealant systems
A SEALFORLIFE COMPANY

Manufacturer:
STOPAQ B.V.

Client services and contact:
STOPAQ B.V.
Gasselterstraat 20
9503 JB Stadskanaal
The Netherlands
T +31 (0)599 696 170
T +31 (0)599 696 177
I www.stopaq.com
E info@stopaq.com

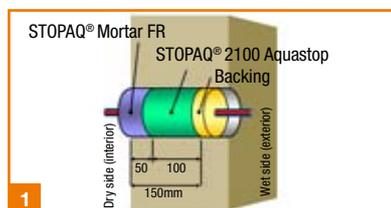


STOPAQ® 2100 AQUASTOP WATERPLUG SYSTEM:
 Backing: **Suitable barrier material**
STOPAQ® 2100 Aquastop (100mm)
STOPAQ® Mortar (50mm)



Prior to application, preheat the cartridges up to 30°C/86°F.



Duct to be cleaned using a brush and cleaning pad. Cleaning with water afterwards is optional, STOPAQ® 2100 Aquastop adheres to wet and dry surfaces. Adhesion can be improved when cables and duct are pre-applied with 2100 Aquastop.

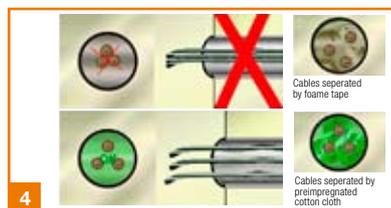

Use foam tape or cotton cloth as suitable barrier and to separate the cables from each other.



Make sure that the barrier is applied 150mm inside the duct.



Lift the cables and apply STOPAQ® 2100 Aquastop with an appropriate application gun around the cables. Use the flexible nozzle to fill 100mm of the duct without air enclosures. Apply from the rear of the duct to the front.



Apply STOPAQ® 2100 Aquastop up to 50mm from the front of the duct.



For flame retardant application use STOPAQ® Mortar FR. For application in wet environment e.g. water basins use STOPAQ® Mortar WR. Only apply mortar on the basement side of the duct.



Clean the remaining 50mm of the duct prior application of mortar. Mix the required amount of mortar with water until it becomes a mouldable mass.



To check for appropriate malleability, the mortar should be moulded to a ball shape without falling apart.



Apply mortar in the remaining 50mm of the duct. Start at the bottom between the cables.



Smoothen the surface of the mortar by using a putty knife and some water.

Compound suited for sealing of wall, pipe or cable inlets and hollow spaces, against gases, moisture, standing water and running groundwater leaks.

FEATURES

- Requires minimal surface preparation
- Adhesion on wet and dry surfaces
- Fast and easy to apply
- Can resist up to 0,3 bar of ground water pressure
- Impermeable to water and gas
- 2100 Aquastop Non Toxic applicator and environmentally friendly
- Unlimited shelflife

BENEFITS

- The sealing remains flexible
- Does not require special application tools
- No material waste - paste reusable
- Immediate sealing: no curing time needed
- Provides permanent and optimal safety
- Adjusts to movements of pipes and cables and environmentally friendly
- Allows for adding and removing cable penetrations by retrofit application

FOR MORE INFO, CHECK THE PRODUCT DATA SHEET AT WWW.STOPAQ.COM

EUROPE - AUSTRALIA - MIDDLE EAST - INDIA - CHINA - MEXICO - USA - CANADA - RUSSIA

